

WAKOL D 1690 Parquet Adhesive

Technical Information


Area of application

Dispersion parquet adhesive according to DIN EN ISO 17178 for the shear-resistant laying of

- Mosaic parquet according to DIN EN 13488
- On-edge lamella parquet according to DIN EN 14761, min. 16 mm thick, max. 200 mm long
- Strip parquet according to DIN EN 13226, oak
- Multi-layer parquet according to DIN EN 13489

on properly prepared absorbent subfloors indoors.

Special properties

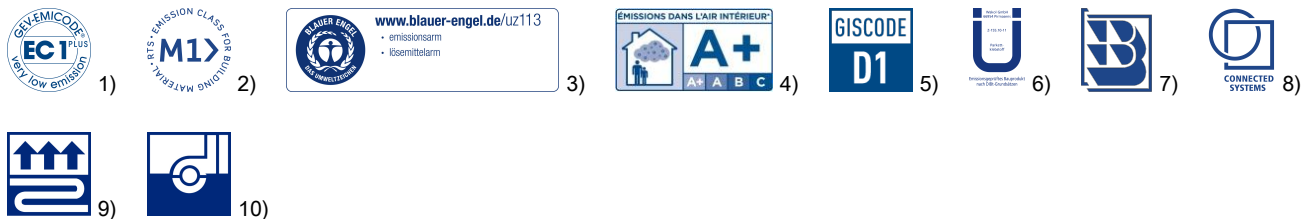

- solvent-free as defined by TRGS 610
- complies with DIN EN ISO 17178

- 1) Based on the criteria of GEV (Association for Emission-controlled Laying Materials), classified as EMICODE EC1 PLUS: very low in emissions
- 2) M1 classification for construction products according to the guidelines of the institute "The Building Information Foundation RTS sr"
- 3) With the "Blue Angel" label for low emission laying materials according to RAL DE – UZ 113
- 4) Emissions class according to French law
- 5) Solvent-free dispersion laying materials
- 6) Emissions-certified construction product i.a.w. DIBt principles: Wakol GmbH, 66954 Pirmasens
- 7) Polish B mark for construction product i.a.w. EN ISO 17178
- 8) Connected Systems guarantee in the system with approved LOBADUR varnishes and LOBASOL oils from Loba. See <https://www.loba.de/en/products/connected-systems/>
- 9) Suitable for underfloor heating
- 10) Suitable for exposure to castor wheels

Technical data

Raw material base: Polymer dispersions
Material composition: Polymer dispersions

	modified natural resins
	mineral fillers
	water
	Wetting, thickening, defoaming and preserving agents (Isothiazolinone)
Airing time:	none
Open time:	approx. 10 minutes
Setting time:	after approx. 24 - 48 hours
Surface treatment:	after the original wood moisture level is attained
Cleaning agent:	Water, before adhesive starts to dry
Storage temperature:	not below +5 °C, sensitive to frost
Storage time:	12 months at room temperature

Application and consumption¹¹⁾

TKB B3	700 - 900 g/m ²	Mosaic parquet Small-formatted ready-to-lay parquet
TKB B11	900 - 1100 g/m ²	On-edge lamella parquet Strip parquet Large-formatted ready-to-lay parquet Small-formatted ready-to-lay parquet

11) Consumption is dependent on surface structure and absorbability of subfloor.

Subfloors

The subfloor as well as the room climate conditions must meet the requirements of the applicable standards and data sheets. Subfloors must be level, extremely absorbent, permanently dry, solid, even, and free from cracks, dirt and adhesion-inhibiting substances.

Additives in cement paving may impair absorbability. Before laying, check that there is sufficient absorbability of the subfloor.

A levelling compound, such as WAKOL Z 615 Levelling Compound, dust-reduced, must be applied with a layer thickness of at least 2 mm when laying parquet on mastic asphalt, calcium sulphate screeds and non-absorbent subfloors.

Alternatively, WAKOL MS or PU Parquet Adhesives can also be used for bonding on mastic asphalt and calcium sulphate screed taking into consideration the corresponding technical information.

Usage

Stir adhesive well before using. Using a notched trowel, apply uniformly on the subfloor, without letting the adhesive pool.

Do not apply more adhesive than can be processed within the specified open time at the parquet. Fit the parquet flooring immediately and press it down firmly. Ensure that the underside of each wooden element is sufficiently coated with adhesive.

Maintain expansion joints along all adjoining components.

Work an environmental safety

Keep out of the reach of children. Ensure sufficient ventilation during use and drying! Avoid eating, drinking and smoking while applying the product and wear protective gloves. Immediately and thoroughly rinse eyes and skin with water in case of contact. Clean tools with soap and water immediately after use. Do not allow product to enter the sewage system, bodies of water or the ground.

The product contains isothiazolinone. Information for allergic persons is available at +49 (0)6331/8001-311.

Disposal

Only empty containers are suitable for recycling. Dried material residue may be disposed of as household waste.

Important

Processing not below floor temperature of +15 °C and room temperature of +18 °C, as well as room humidity preferably between 40 % and 65 %, maximum 75 %. All information is based on approx. 20 °C and 50 % relative air humidity.

Strip parquet must not exceed a thickness/width ratio of 1:4 or a length of 600 mm.

Before laying multi-layer parquet with MDF/HDF substrate, consult the Application Technology department.

For laying exotic parquet, strip parquet with other types of wood than oak as well as for finished 1-layer parquet floor elements, use Wakol MS or PU Parquet Adhesives.

We guarantee the uniform high quality of our products. All data is based on tests and many years of practical experience and refers to standardised conditions. The variety of materials used and the different construction site conditions, which lie beyond our control, preclude any claims based on this data. We therefore recommend making sufficient trials. Accompanying flooring manufacturer's instructions and the currently applicable codes must be observed. We gladly provide technical advice.

The product data sheets can be found in their latest version at www.wakol.com.

This Technical Information of 26.08.2021 supersedes all previous versions.