


# Fast grip!

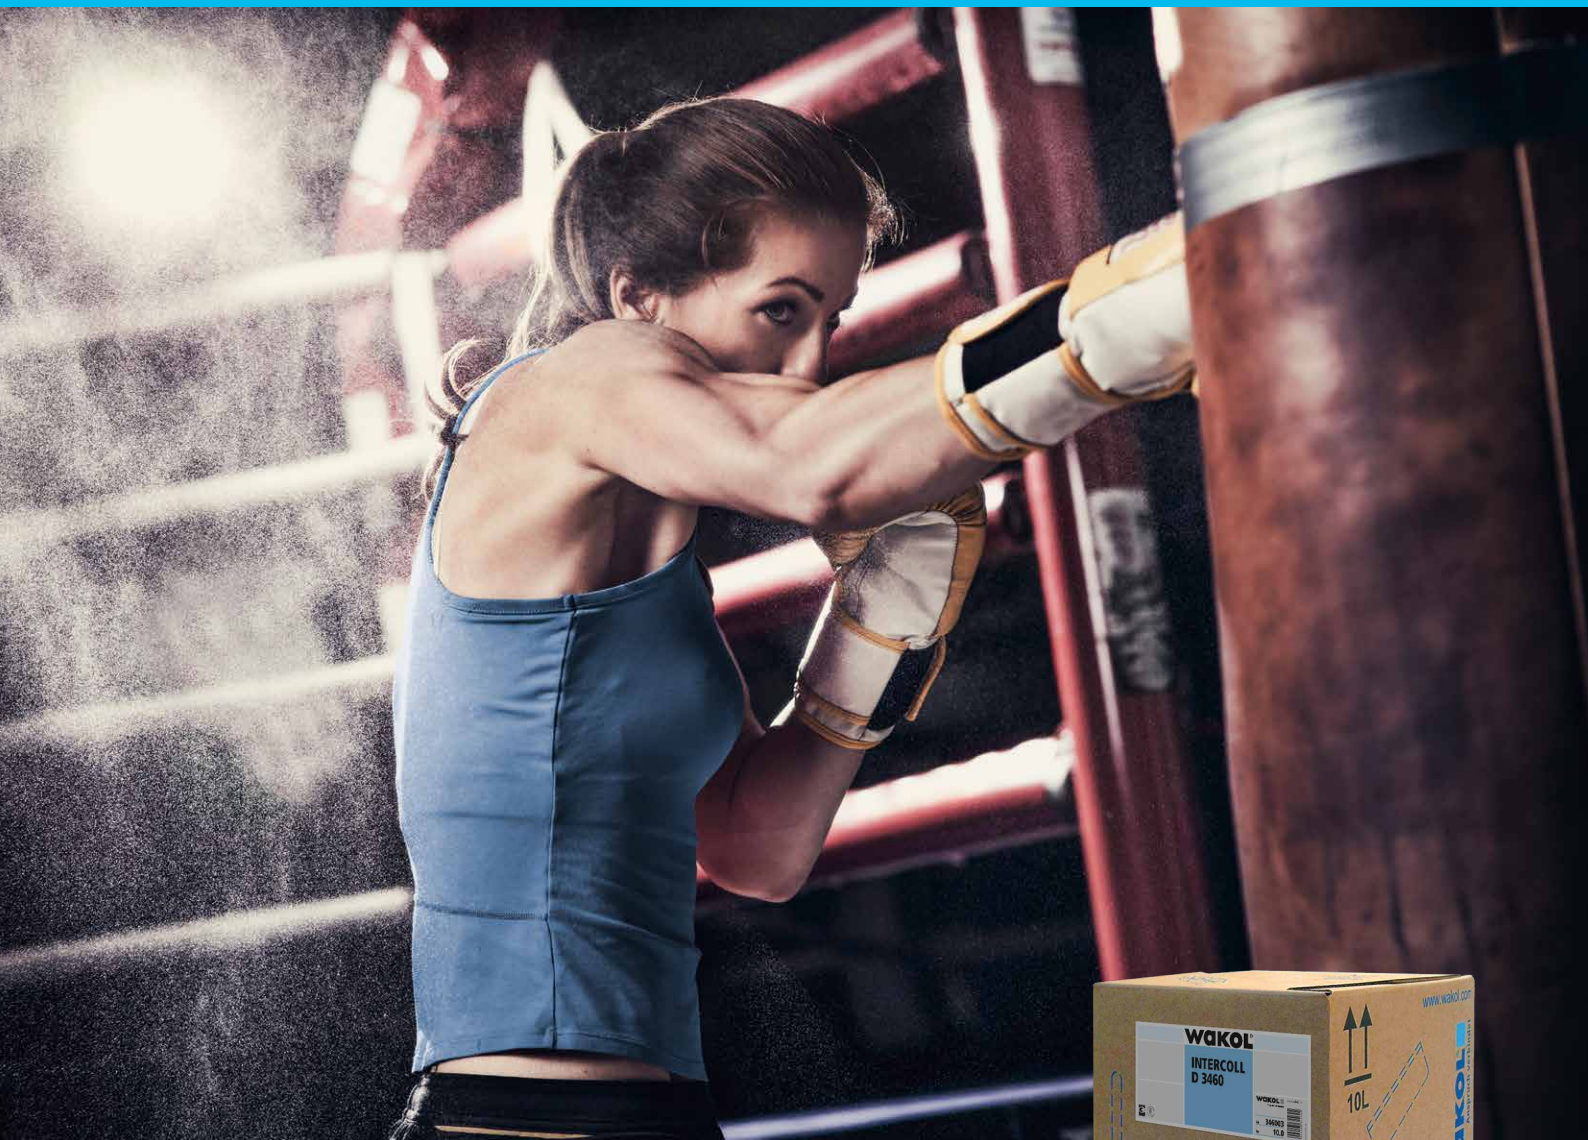

## INTERCOLL D 3460 Spray adhesive for foams

Very fast – extremely high initial tack

Quick – no airing time required

Easy – single-component, bag-in-box packaging

User-friendly – genuine alternative to solvent-containing adhesives

Product:



**WAKOL®**  
Anspruch verbindet



# INTERCOLL D 3460 – high-performance spray adhesive for foams



## One product for all purposes

INTERCOLL D 3460 bonds all usual padding materials, e.g. foam, fleece, cover fabrics, wood, hard fibre and cardboard. The water-based polychloroprene-latex adhesive is also ideal for more difficult substrates such as non-woven fabrics, visco foam, etc.

## Very fast, high initial tack

INTERCOLL D 3460 enables a high working speed thanks to its high initial tack. This is achieved with a new formulation concept, whereby the adhesive already coagulates in the spray jet, thus no airing time is required. INTERCOLL D 3460 is a high-performance contact adhesive, which leads to immediate material fracture. But it can also be used as a single-sided adhesive, thus allowing for corrections. Based on these properties, INTERCOLL D 3460 represents a genuine alternative to solvent-containing adhesives.

## Low consumption

INTERCOLL D 3460 can be used at a low spraying pressure, thus reducing the overspray and optimising consumption. Despite the low spraying pressure, a high initial tack is achieved compared with commercially available single-component water-based foam adhesives.

## Simple application, as single-component

The product can be applied using the "free-flow" method. To carry the material and to build up the necessary material pressure in the gun, no special complicated equipment is required. The practical packaging units can simply be placed on a shelf at least one metre above application height. The hydrostatic pressure resulting from the height difference is entirely sufficient



for the required material quantity. In comparison to the mixed two-component adhesive, INTERCOLL D 3460 contains more solid material and therefore has a lower water content. This adds a drying benefit.

## User-friendly

INTERCOLL D 3460 is odourless. It is easy to remove from the fingers. Adhesive on floorings does not create any slippery surfaces.

## High quality for the end product

INTERCOLL D 3460 has a very high ageing resistance, which in turn leads to the long life of the end product. The environmental friendliness is certified with the TÜV certificate "emissions-tested" and the Eco Passport.

Please always observe the technical information before processing.